

PRODUCT INFORMATION BULLETIN

FUJIFILM 200 Color
Negative Film

REF NO.

AF3-0261E

ISSUE DATE

09 FEB 2022

1. FEATURES AND USES

FUJIFILM 200 is a daylight color negative film with an ISO speed rating of 200. This film yields the best results when used in conjunction with FUJICOLOR papers.

Features

Excellent Grain Quality	Fine grain for a high-speed film, providing no loss of image quality even in large-size enlargements
Wide Exposure Latitude	Stable results can be expected under a variety of photographic conditions
Excellent Skin Color Reproduction	Smooth, beautiful and naturally depicted skin tones
Excellent Sharpness	Extremely sharp depiction of all aspects of the subject, from overall form to textural details

It requires no color-compensating filters when used under daylight conditions or with an electronic flash.

2. SPEED

Light Source	Speed	Filter
Daylight	ISO 200/24 ^o	None
Tungsten Lamps (3200K)	ISO 50/18 ^{o*}	Wratten No. 80A (or LBB-12 ^{**})

* Indicates the effective speed resulting from designated filter use.

** Fuji Light Balancing Filter

3. FILM SIZES, PRODUCTION NUMBER, BASE MATERIAL AND THICKNESS

Size and Package Configuration		Base Material	Base Thickness
Roll	135...36-exp	Cellulose Triacetate	122 μ m (135)

4. EXPOSURE GUIDE

Use an exposure meter for exposure determination. If a meter is not available, refer to the following table.

Daylight Exposure Guide Table

Light Conditions	Seashore or Snow Scenes under Bright Sun	Bright Sunlight	Hazy Sunlight	Cloudy Bright	Cloudy Day or Open Shade
Lens Aperture	f/16	f/16	f/11	f/8	f/5.6
Shutter Speed (sec.)	1/500	1/250			

NOTES 1) The foregoing settings are for 2 hours after sunrise and 2 hours before sunset. 2) For close-up shooting against light, open the lens 1 or 2 aperture stops.

Low Light Exposure Guide Table

Light Conditions	Fine Weather Daytime Indoor Scenes	Nighttime Indoor Scenes (under Fluorescent Light)	Evening Scenes	Night Scenes
Lens Aperture	f/2.8 to 4	f/2 to 2.8	f/2.8 to 4	f/2 to 2.8
Shutter Speed (sec.)	1/30			

NOTE Since light intensifies for indoor and night scenes vary widely from location to location, the data above should be used only as a guide.

5. EXPOSURE UNDER VARIOUS LIGHT CONDITIONS

Daylight

Even when exposed under morning or evening twilight conditions or when color temperatures are low, no special filter use is needed as color balancing can be done during printing.

Electronic Flash

- Electronic flash produces light similar to daylight, so filters are not needed. However, the possibility of undesirable effects on color balance, due to various factors (the type of flash used and amount of time used, etc.) should be taken into consideration. Test exposures are recommended.
- If shutter speeds slower than 1/60 second are used, light from non-flash sources, such as room lighting, may cause color imbalances. Make test exposures.
- The use of a flash meter is advisable, but the following formula can also be used to obtain satisfactory lens opening.

$$\text{Lens Aperture (f-number)} = \frac{\text{Electronic Flash Guide Number (at ISO 200)}}{\text{Electronic Flash-to-Subject Distance (meters)}}$$

- When using an auto flash unit, the ISO film speed setting should be set to 200. Since the amount of light on the subject may vary according to amount of light reflected from surrounding surfaces and other factors, follow the instructions provided with the flash unit.

Daylight Photoflood/Photo-Reflector Lamps

- Daylight-type photoflood or photo-reflector lamp output may be lower than that indicated by the exposure meter. It is recommended to compensate for the difference by increasing the exposure time (by lowering the shutter speed) or by increasing the lens opening. Whenever possible, test exposures are recommended.
- Other factors that should be considered when determining the exposure settings are lamp configuration, length of time used and line voltage, as they may affect lamp output and color balance.

Fluorescent Lamps

- Photographing under fluorescent lighting may result in a greenish tint. However, this phenomenon is corrected during printing, thus achieving optimal finishing quality. For this reason, additional use of correction filters is not required. A slow shutter speed of less than 1/30 second is recommended.

Tungsten Lamps

- When using 3200K tungsten lighting, use a Wratten filter No. 80A (Fuji LBB-12* filter) and increase the lens opening by +2 stops. In the case of cameras with TTL metering, there is no need for additional exposure compensation.

*Fuji Light Balancing Filter

6. EXPOSURE PRECAUTIONS

When using an accessory such as a reflector umbrella, reflector or diffuser to control light intensity or diffuse the light, make sure that no change has occurred in the color or composition of the accessory's materials or reflective surface, and that the color of the light has not been altered by the material.

7. UNPROCESSED FILM HANDLING / STORAGE

Handling

- Expose film before the expiration date indicated on the film package and process as soon as possible after exposure.
- Roll film should be loaded and unloaded quickly and away from direct sunlight.
- Film loaded in cameras should be exposed and processed promptly.
- X-ray inspection machines used to inspect checked-in baggage at airports can cause fogging of film. Put both exposed and unexposed film into carry-on baggage (preferably in a transparent plastic bag or a net bag that allows the film to be seen). Because of the increasing number of airports using strong X-ray machines for carry-on baggage, it is recommended that you remove film from your carry-on baggage and request a visual (manual) inspection of your film.
- Film fogging may occur near X-ray equipment used in hospitals, factories, laboratories and other places where radiation is used. Always keep film away from sources of radiation.

Storage

Storing exposed or unexposed film under hot and humid conditions may adversely affect the speed, color balance and physical properties of the film. Although it is best to store film at a low temperature, for practical purposes, film should be stored as follows:

Short-term Storage	Store at 15°C or below
Long-term Storage	Store at 0°C or below

- New building materials, newly manufactured furniture, paints and bonding agents may produce gases which could affect photographic film. Do not store film, lightproof boxes containing film or cameras or film holders loaded with film near these materials.
- Film should be sealed in plastic bags* prior to cold storage. When taken out of cold storage, film should be allowed to reach room temperature before opening by letting it stand over 3 hours (for refrigerated film) or over 6 hours (for frozen film). Opening film while it is still cold may cause condensation to form on the film surface, causing color changes or the emulsion to become more susceptible to scratches.

*Polyester, polystyrene, polyethylene, polypropylene, etc.

8. PROCESSING

This film is intended for processing by Fujifilm Processes CN-16, CN-16Q, CN-16FA, CN-16L, CN-16S or Process C-41.

8-1 Replenishment Rate

The following table shows the replenishment rates for each type of Fujifilm Processes.

CN-16Q		CN-16FA	
Processing Solution	Replenishment Rate*	Processing Solution	Replenishment Rate*
NQ1-R	43	N1-R	22
NQ2-R	20	N2-R	5
NQ3-R	30	N3-R	16
NQS	30	NS	34
NQ4-R	20	N4-R	20

CN-16L		CN-16S	
Processing Solution	Replenishment Rate*	Processing Solution	Replenishment Rate*
N1-R	20	N1-R	15
N2-R	5	N2-R	5
N3-R	8	N3-R	7.5
NS	17	N4-R	30
N4-R	15		

*Replenishment Rate...Replenisher volume (mL) per single roll (135/24 exp.)

8-2 Photographic and Processing Characteristics

Almost the same as those for the current C200.

9. PRINTER CONDITIONS

This film can be printed on the same printer setup with results similar to C200.

10. CONTROL STRIPS

Use FUJICOLOR NEGATIVE FILM CONTROL STRIPS to manage processing performance.

11. PROCESSED FILM HANDLING & STORAGE

Since the purpose of film is to provide a long-term record of memorable events, as much effort as possible has been made to use materials that exhibit the least amount of change over time, but the effects of light, heat, atmospheric oxygen, contaminant gases, humidity and mold cannot be completely avoided. It is possible, however, to minimize change in the photographic image or base material by maintaining appropriate storage conditions, such as those used by museums and art galleries. Temperature and humidity control is the most important key to minimizing the change that occurs in film. Films stored in the dark under the following conditions may be expected to show almost no change over time.

Storage Period with Almost No Change	Temperature	Relative Humidity
More than 20 years	Below 10°C	30%-50%
10-20 years	Below 25°C	30%-50%

1. Color negative film should be inserted into sleeves for storage. Furthermore, it is recommended that film, as well as prints, be placed into non-airtight* containers made of paper, plastic**, or metal designed for the storage of photographs.

* To prevent film base (especially TAC base) decomposition, it is essential that the container or case be allowed to air out during one dry day each year.

** Polyester, polystyrene, polyethylene, polypropylene, etc.

2. Processed film should be stored at a place as far away as possible from high temperatures, direct sunlight and other strong light and direct illumination. The following conditions are not desirable for the storage of film and should be avoided in the case of long-term storage:


- Storage in a closet lying against a wall that is exposed to cold, outside air (where condensation may form).
- Storage in an attic or on top of a closet or cabinet near the ceiling (where high temperatures may form).

12. PROCESSED FILM EDGE MARKINGS AND FIGURES

Edge Markings


Item	
Type Designation	FUJI 200

13. FILM STRUCTURE

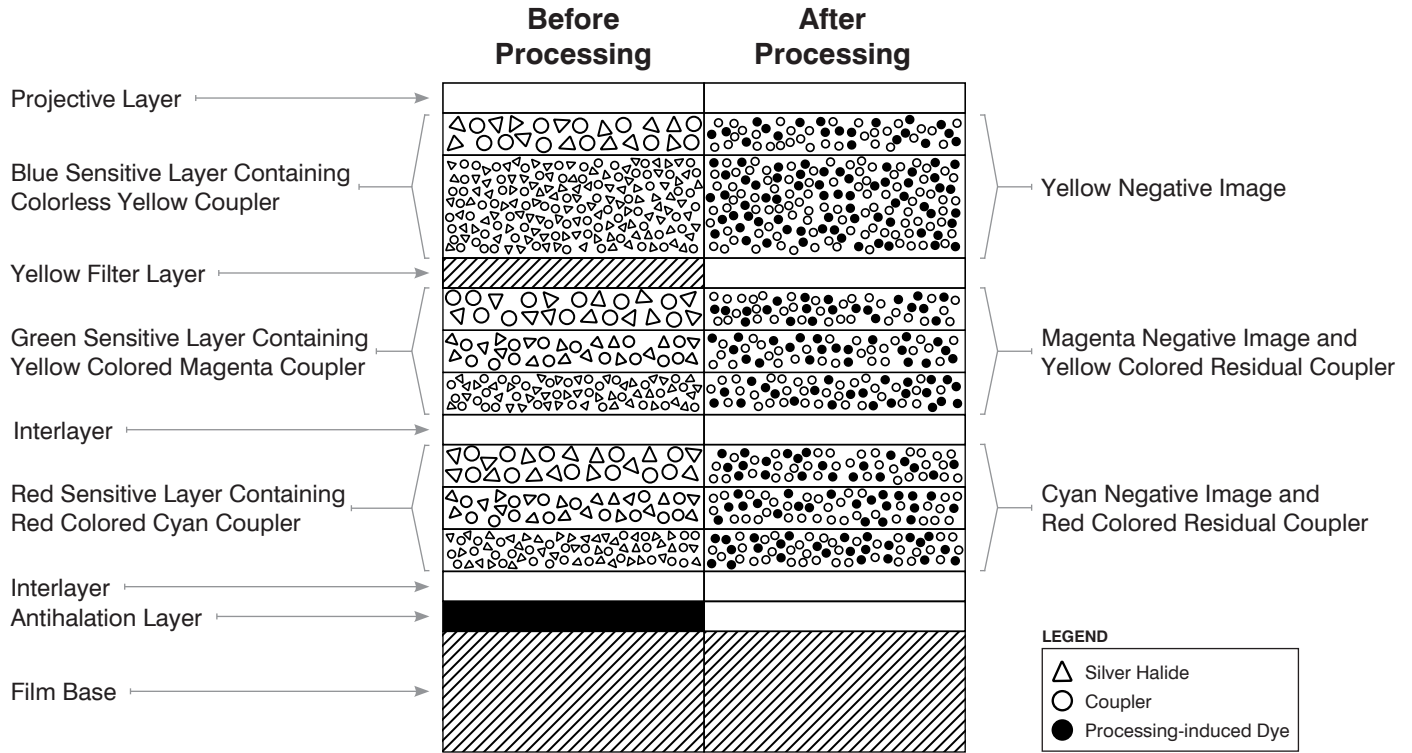


14. PROCESSED FILM EDGE MARKINGS AND FIGURES (CONTINUED)


135 Size (36 Exp.)

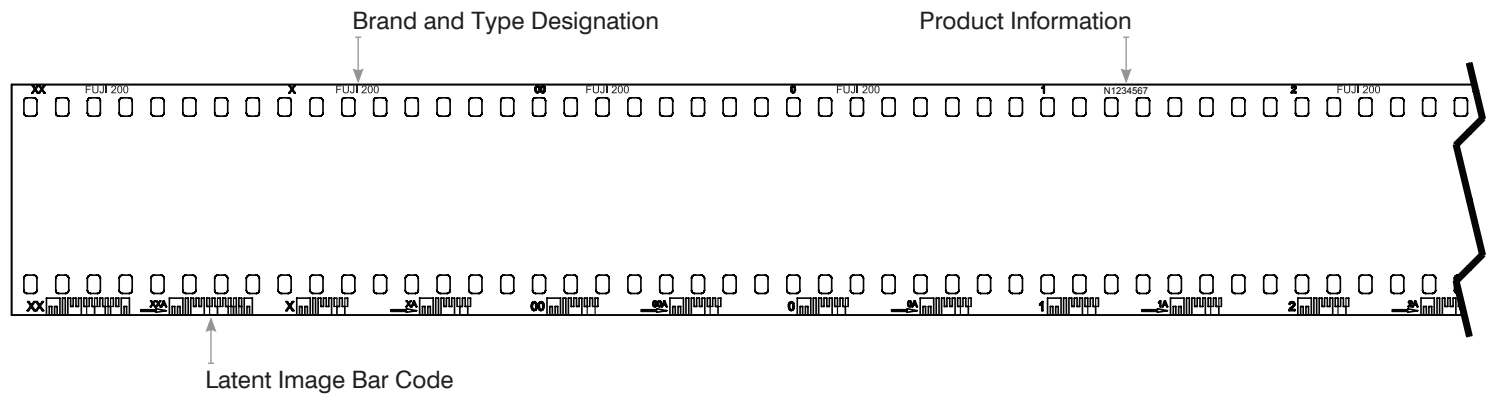

15. CHARACTERISTIC CURVES

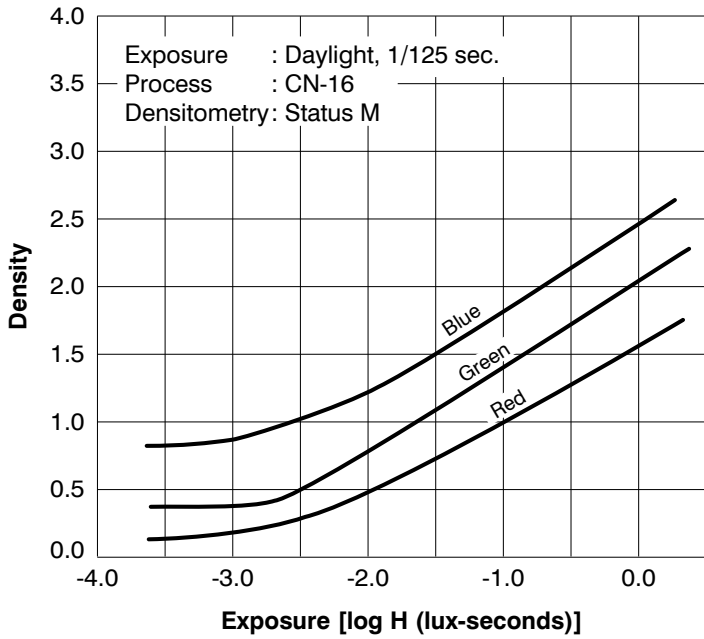


17. SPECTRAL SENSITIVITY CURVES

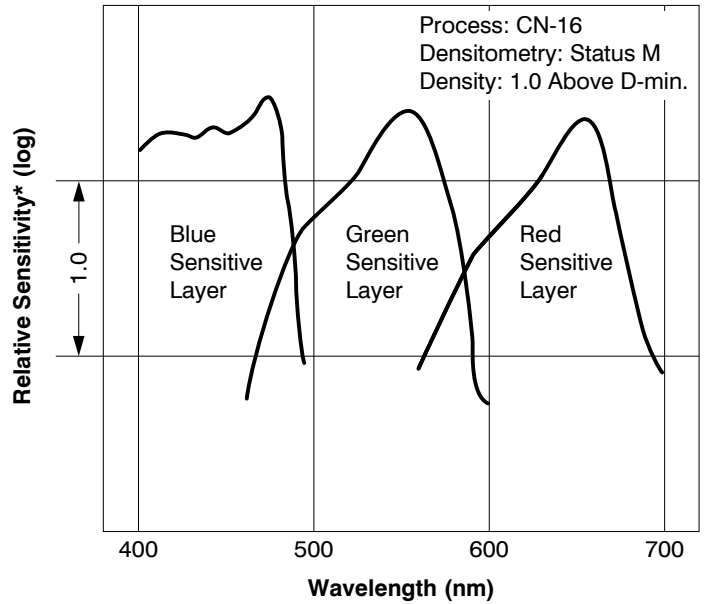

* Sensitivity equals the reciprocal of the exposure (J/cm²) required to produce a specified density.

16. SPECTRAL DYE DENSITY CURVES

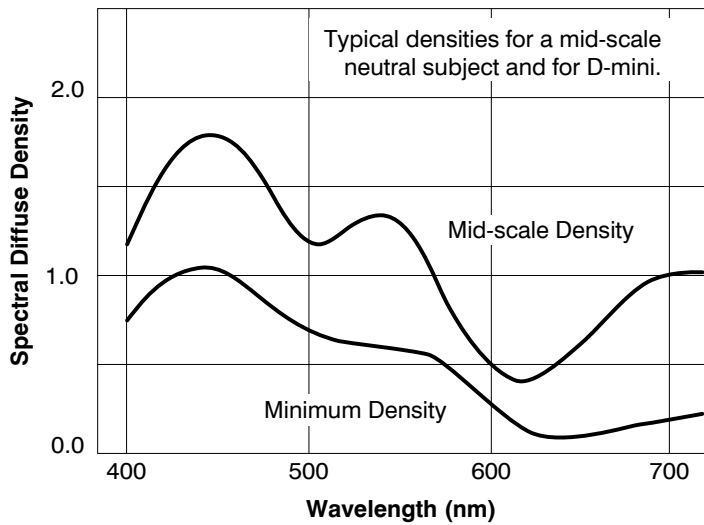

NOTICE The data herein published were derived from materials taken from general production runs. However, changes in specifications may occur without prior notice.